

Položajno zaznavalo za premični robot

Position Sensor for a Mobile Robot

Rajko Mahkovic

(Fakulteta za računalništvo in informatiko, Ljubljana)

V prispevku predstavljamo izvirno položajno zaznavalo za premični robot. Zaznavalo je namenjeno natančnemu merjenju položaja premičnega robota. Sestavlja ga merilno kolesce, absolutni zapisovalnik

matematično izpeljavo razmerja med spremjanjem smeri merilnega kolesca, njegove prevožene razdalje in spremembo robotovega položaja v kartezičnem koordinatnem sistemu. Obravnava je razdeljena na dve stanji: ko je merilno kolesce usklajeno s smerjo premikanja robota in ko ni usklajeno. Predstavljeni so eksperimentalni rezultati na dveh vrstah poti premičnega robota: vožnji v obliki osmice in vožnji po dolgem in ozkem hodniku. Rezultati kažejo, da je predlagano položajno zaznavalo tako natančno, kakor klasična rešitev z dvema merilnima kolescema, nameščenima na vsako stran od pogonskega kolesa. Položajna napaka zaznavala na omenjenih poteh, dolgih 20 m, v obliki osmice, in 120 m v primeru hodnika, znaša manj kot 0,4 odstotka prevožene poti. Položajnemu zaznavalu moramo določiti vrednosti štirih parametrov: obseg merilnega kolesca, ničelni kot zasuka, odmaknjenos merilnega kolesca in oddaljenost mesta namestitve zaznavala od referenčne točke premičnega robota.

© 2007 Strojniški vestnik. Vse pravice pridržane.

(Ključne besede: mobilni robot, položajna zaznavala, merilni sistemi, odometrija)

A new position sensor is presented, designed for accurate measurements of the relative position of a mobile robot. It consists of a measurement wheel, an absolute optical encoder for measurements of the robot's orientation and a relative encoder for measurements of the distance covered by the robot. A mathematical description of the relation between the measurement wheel's orientation alteration, the distance that has been covered and the change of the robots' position in the Cartesian coordinate system is given. The discussion is divided into two situations: the first, in which the measurement wheel is aligned with the current robot's path, and the second, in which it is not. In the experiments the robot was sent to drive along a figure-of-eight-shaped path and along a long and narrow corridor. The results prove that the proposed sensor is as accurate as the classical solution of two additional measurement wheels, mounted on each side of the driving wheels. The error in the position remains below 0.4% of the travelled path for both types of paths. The position sensor needs to be calibrated with the values of four parameters: the circumference of the measurement wheel, the initial offset (the angle of the absolute encoder corresponding to the zero orientation of the robot), the eccentricity of the measurement wheel, and the distance between the sensor and the reference point of the robot.

© 2007 Journal of Mechanical Engineering. All rights reserved.

(Keywords: mobile robots, position sensors, measurement systems, odometry)

0 UVOD

Odometrične merilne metode, merilne metode, ki temeljijo na merjenju prevožene poti, so, kakor kaže, še vedno dovolj natančno in ceneno sredstvo za določanje trenutnega položaja premičnega robota. Vrsta metod [1], ki določajo absolutno lego robota, sicer zagotavlja poznavanje njegove lege, vendar le

0 INTRODUCTION

Odometric measurement methods, i.e., methods based on the covered-path measurement, still seem to be a reasonably accurate and cheap means of supplying a mobile robot with its position. There are many methods [1] for determining a mobile robot's absolute position; however, only at specific

na posebnih mestih delovnega prostora. Navadno moramo za to poseči v delovni prostor robota, z nameščanjem, recimo, nalepk, dejavnih oddajnikov, ali pa se zanesti na razpoznavanje njegovih krajevnih značilnosti (stene, vrata, predmeti itn.) Zelo primerne so, na primer, Voronojeve točke pospoljenega istoimenovanega diagrama delovnega prostora [6]: ne samo, da dajejo rekalibracijo robotove lege, osvežimo lahko tudi njegovo usmeritev. Ob tem, da je gibanje v delovnem prostoru načeloma najbolj varno, saj je Voronoijev diagram krčenje praznega prostora, zato je robot pri premikanju vzdolž Voronoijevega diagrama najbolj oddaljen od ovir, kot je to le mogoče.

Pri delu z notranjimi premičnimi roboti imamo običajno na voljo njihovo absolutno lego le v posameznih točkah prostora, za premik od ene absolutne lege do druge pa se odločimo za neko relativno merilno metodo. Odometrija se v ta namen izkaže kot primera izbira, njen najbolj natančna izvedba, uporaba dodatnih merilnih koles, pa kot poceni in učinkovita relativna merilna metoda ([4] in [5]). Taka merilna kolesca se običajno namesti na levo in desno stran pogonskih koles premičnega robota.

Ker se je pokazalo, da je namestitev takih merilnih koles tako konstrukcijsko, kakor gibalno (premični robot se ne more premikati vzvratno) precej omejujoče, smo želeli poiskati tako konstrukcijo merilnega kolesca, ki za robota ne bi bila tako omejujoča, ne bi bila tako odvisna od razlik v izdelavi merilnih koles, a bi še vedno ohranila vse prednosti odometrije. Razlika v, na primer, obsegu merilnih koles se tako na koncu izraža kot zasuk v usmeritvi robota; ta poleg tega lahko nastane dodatno tudi zaradi daljše prevožene poti enega od koles, ker se pač kolesa kotalita po različno ravnih podlagah.

1 POLOŽAJNO ZAZNAVALO

Položajno zaznavalo na sliki 1 sestavlja relativni optični enkoder za merjenje prevožene poti, zapis premika, in absolutni optični zapisovalnik za merjenje trenutne robotove usmeritve, zapisovalnik smeri. Zasnova zapisovalnika poti ni običajna: namesto osvetlitve skozi masko, ki pri kolesu pač ni izvedljiva, smo uporabili odboj od maske, nalepljene na merilno kolesce. Masko, izjedkana iz plošče za izdelavo električnih tiskanih vezij, ima tri sledi: zunanjji dve s po 180° zarezami na zasuk sta fazno premaknjeni za 90° (tak fazni premik mask je pri zapisovalnikih običajen način za podvojitev


positions of the working space. Nevertheless, some kind of intervention in the working space is necessary for them to be applied, e.g., the placement of labels, active transmitters, or recognition of the local features of the working space (walls, doors, various objects, etc.). For example, Voronoi points of the generalized Voronoi diagram could serve for this purpose [6]: not only the robot's position, but also its orientation could be recalibrated. In addition to this, the motion of the robot is safer, since the Voronoi diagram is a *retraction* of the free space, which guarantees that the robot is as far from obstacles as possible.

An indoor mobile robot is supplied, as already mentioned, with its absolute position only at specific places of the working space; to move among these places it needs to rely on a kind of relative measurement method. Odometry has proved to be a quite effective choice, especially in its most accurate implementation, with the use of *additional* measurement wheels ([4] and [5]). Such measurement wheels are normally placed to the right- and left-hand sides of the robot's driving wheels.

Unfortunately, such wheels turn out to be awkward to mount, and they restrict the movements of the robot. Therefore, it was our intention to find such a construction of an additional measurement wheel that would not depend so strongly on the differences between both wheels (which actually introduce positional errors), yet it would still preserve all the advantages of odometry. The difference, for instance, in wheels' circumferences manifests itself as an additional turn in the orientation of the robot; the same effect could be produced by the difference in the lengths of the paths the measurement wheels travel along, caused by an uneven floor.

1 POSITION SENSOR

The position sensor in Figure 1 consists of a relative optical encoder, designed to measure the traversed path, a *distance encoder*, and an absolute optical encoder, applied to measure the robot's changes in orientation, a *steering encoder*. The design of the distance encoder is not the common one: instead of lighting through the glassy mask, which is not applicable on the wheel, the *reflection* from the mask, glued directly on the wheel, is used. The mask, etched from an electronic circuit board, has three tracks: the outer two, with 180 lines around the circumference, are shifted in phase by 90° (this phase

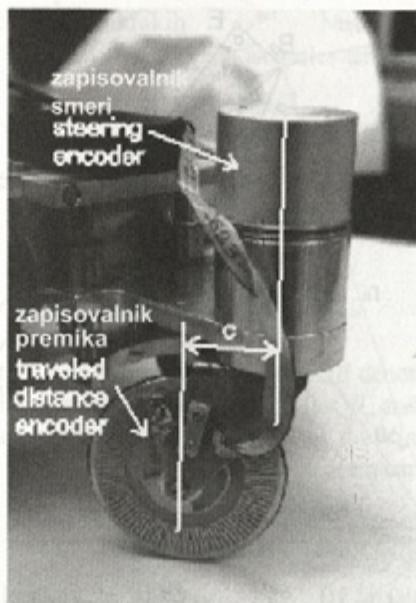

Sl. 1. Zaznavalo sestavlja zapisovalnik smeri in zapisovalnik premika
Fig. 1. The sensor consists of a steering encoder and a distance encoder

ločljivosti). Tretja sled ima vsega eno označbo, ki je uporabljena za izhodišče merjenja po krogu, referenčni sunek.

Merilno kolesce se, kakršen koli že je njegov začetni zasuk, med vožnjo postopno poravnava s smerjo vožnje; glede na os zapisovalnika smeri je namreč nameščeno izsredno. Med vožnjo se torej iz prevožene razdalje in trenutne smeri izračunava premik robota v kartezičnem koordinatnem sistemu.

Matematični opis merilnega sistema podajamo v nadaljevanju. Izkaže se, da moramo obravnavo pravzaprav razdeliti na dva primera: prvič, da je merilno kolesce v smeri vožnje poravnano, in drugič, da merilno kolesce v smeri vožnje robota še ni poravnano.

V nadaljevanju bomo obravnavali najprej zahtevnejši drugi primer, pri katerem torej merilno kolesce ni poravnano s smerjo vožnje; predvidevamo, da nam bo obravnavava tega primera ponudila zadosten vpogled tudi za obravnavavo primera, pri katerem je merilno kolesce poravnano.

2 NEPORAVNANO MERILNO KOLESCE (NMK)

Predpostavimo, da se robot giblje vzdolž krožnega dela poti. Referenčno točko robota bomo označili s T_{1x} , središčno točko zapisovalnika smeri z B_x , dotikalische merilnega kolesca s tlemi A_x ; pri

shift is commonly applied in optical encoders to double the resolution); the third track has only one line, used to mark the position of each full turn of the wheel, the reference pulse.


The measurement wheel, whatever its initial orientation, aligns gradually with the direction of the path; because it is mounted eccentrically in terms of the axis of the orientation encoder. During the movements, the traversed distance and the current orientation determine the change of the position in the Cartesian coordinate system.

A mathematical description of the measuring system is given below. It turns out that the discussion should be divided into two situations: the first, in which the measurement wheel is *aligned* with the orientation with the robot, and the second, in which it is not.

The following discussion will first focus on the second, more demanding situation, in which the measurement wheel is not aligned with the orientation of the robot; we believe this case will also give us sufficient insight into the former.

2 NON-ALIGNED MEASUREMENT WHEEL (NMW)

Let us suppose the mobile robot moves along a circular arc. We denote the reference point of the robot by T_{1x} , the centre of the steering encoder by B_x , the contact point of the measurement wheel with the

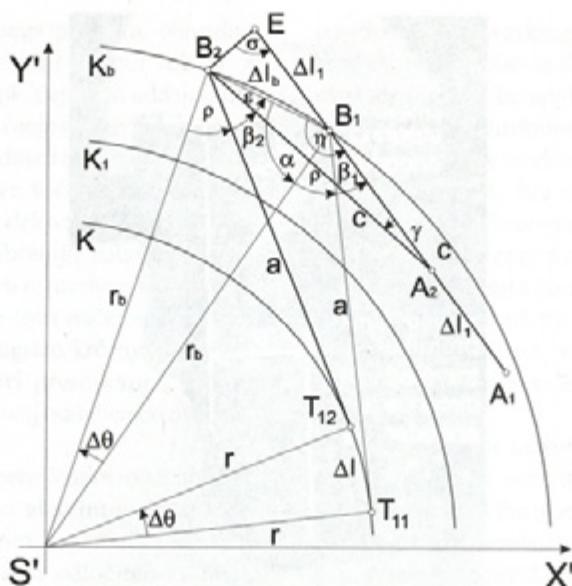

Sl. 2. Geometrijska oblika premika za NMK
Fig. 2. Geometrical illustration of NMW-type movements

x označuje indeks položaja pred premikom robota (1) in po premiku (2). Dolžini $|A_1B_1|$ in $|A_2B_2|$ pomenita premik c , označen na sliki 1, a pa razdaljo med referenčno točko robota in osjo kodirnika smeri (dolžini $|T_{11}B_1|$ in $|T_{12}B_2|$).

Ko se, na primer, referenčna točka robota premakne po krožnem loku z ukrivljenoščjo K iz T_{11} v T_{12} , se središče enkoderja smeri premakne po krožnem loku z ukrivljenoščjo K_b iz B_1 v B_2 , dotikaljše merilnega kolesca pa iz A_1 v A_2 . Pri tem referenčna točka robota opravi premik po krožnem loku Δl , smer oziroma usmeritev robota pa se spremeni za $\Delta\Theta$. Če bi bilo nadalje, merilno kolesce že poravnano glede na smer vožnje, bi A_1 in A_2 ležali na krožnem loku s polmerom K_1 . Predpostavimo, da je premik dovolj majhen, da lahko vzamemo, da A_2 leži kar na daljici $\overline{A_1B_1}$. Premik Δl_1 je pri tem razdalja, izmerjena z kodirnikom poti. (Vidimo, da sta Δl_b in Δl krožna loka, medtem ko je Δl_1 daljica.) Točko E določimo tako, da dobimo enakokraki trikotnik ΔA_2B_2E .

floor by A_x , where x denotes the index of the position before the movement (1) and after the movement (2). The straight lines $|A_1B_1|$ and $|A_2B_2|$ are the eccentricity c from Figure 1, whereas a is the distance between the robot's reference point and the centre of the steering encoder (straight lines $|T_{11}B_1|$ and $|T_{12}B_2|$).

As, for example, the robot's reference point moves along a circular arc with the curvature K from T_{11} to T_{12} , the centre of the steering encoder moves along the circular arc with the curvature K_b from B_1 to B_2 , whereas the contact point of the measurement wheel moves from A_1 to A_2 . During this movement, the robot's reference point moves along the arc Δl , while the change in the orientation of the robot amounts to $\Delta\Theta$. Furthermore, if the measurement wheel was aligned with the path of the movement, the points A_1 and A_2 would lie on the circular arc with curvature K_1 . Let us presume that the movement is small enough to assume that A_2 lies on the straight line $\overline{A_1B_1}$. The length Δl_1 is the distance measured by the distance encoder. (Note that Δl_b and Δl are circular arcs, whereas Δl_1 is a straight line.) Point E is determined in such a way that an isosceles triangle, ΔA_2B_2E , is formed.

2.1 Izračun spremembe robotove usmeritve

Iz enakih pravokotnih trikotnikov $\Delta S'T_{11}B_1$ in $\Delta S'T_{12}B_2$ lahko izračunamo kot ρ :

$$\rho = \arccos(a/r_b) \quad (1)$$

We calculate the angle ρ from the observation of two rectangular triangles $\Delta S'T_{11}B_1$ and $\Delta S'T_{12}B_2$:

Kota α in σ izračunamo iz enakokrakih trikotnikov $\Delta S'B_1B_2$ in ΔA_2B_2E :

$$\alpha = (\pi - \Delta\Theta)/2$$

$$\sigma = (\pi - \gamma)/2$$

S tem pa že lahko izračunamo vse tri kote v trikotniku $\Delta A_2B_2B_1$:

$$\varepsilon = \pi/2 - \Delta\Theta/2 - \rho - \beta_2$$

$$\eta = \pi/2 - \Delta\Theta/2 + \rho + \beta_1$$

$$\gamma = \Delta\Theta + \Delta\beta$$

kjer je $\Delta\beta$ razlika med končnim kotom β_2 in začetnim kotom β_1 . Po določitvi še vseh treh stranic trikotnika $\Delta A_2B_2B_1$, lahko na njem uporabimo sinusni izrek:

$$\frac{2r_b \sin(\Delta\Theta/2)}{\sin(\Delta\Theta + \Delta\beta)} = \frac{c}{\sin(\pi/2 - \Delta\Theta/2 + \rho + \beta_1)} = \frac{c - \Delta l_1}{\sin(\pi/2 - \Delta\Theta/2 - \rho - \beta_2)} \quad (2)$$

Iz razmerja prvih dveh ulomkov že lahko dobimo diferencialno enačbo, tako da pošljemo spremembu $\Delta\beta$ in $\Delta\Theta$ proti nič. Zavedati pa se moramo, da če hkrati pošljemo $\Delta\beta$ in $\Delta\Theta$ proti nič, bodo vse izpeljane enačbe veljale le v primeru, če je zapisovalnik smeri neporavnani v smeri vožnje. Dobimo naslednjo diferencialno enačbo:

$$\frac{r_b d\Theta}{d\Theta + d\beta} = \frac{c}{\cos(\beta + \rho)} \Leftrightarrow r_b \cos(\beta + \rho) d\Theta = c d\Theta + c d\beta \quad (3)$$

iz katere izrazimo $d\Theta$:

$$d\Theta = \frac{c}{r_b \cos(\beta + \rho) - c} d\beta \quad (4)$$

Po integraciji leve strani enačbe od 0 do $\Delta\Theta$ in desne strani od β_1 do β_2 ter zapisu ukrivljenosti namesto obratne vrednosti polmera krožnega loka $K_b = 1/r_b$, dobimo enačbo spremembe usmeritve robota

$$\Delta\Theta = \frac{c K_b}{\sqrt{1 - c K_b}} \ln \frac{\Phi_+(\beta_2) \Phi_-(\beta_1)}{\Phi_-(\beta_2) \Phi_+(\beta_1)} \quad (5)$$

kjer sta

in

$$\Phi_-(\beta_i) = (1 + c K_b) \tan \left(\frac{\beta_i + \rho}{2} \right) - \sqrt{1 - c K_b^2}$$

and

$$\Phi_+(\beta_i) = (1 + c K_b) \tan \left(\frac{\beta_i + \rho}{2} \right) + \sqrt{1 - c K_b^2}$$

2.2 Izračun prevožene poti merilnega kolesca

Prevožena pot merilnega kolesca Δl_1 je sicer podatek, ki ga preberemo iz zapisovalnika premika,

Next, angles α and σ are calculated from the isosceles triangles $\Delta S'B_1B_2$ and ΔA_2B_2E :

And now, all three angles in the triangle $\Delta A_2B_2B_1$ can be determined:

where $\Delta\beta$ denotes the difference between the angles after, β_2 , and before, β_1 , the movement. After the sides of the triangle $\Delta A_2B_2B_1$ are established, the sine theorem can be applied to it:

By limiting the changes $\Delta\beta$ and $\Delta\Theta$ towards zero, the relation of the first two fractions supplies us with the differential equation. However, we have to keep in mind that sending both differences to zero simultaneously implies that all the derived equations will hold only to the NMW situation. The following equation is obtained:

After the integration of the left-hand side from 0 to $\Delta\Theta$ and the right-hand side from β_1 to β_2 , and the use of the curvature $K_b = 1/r_b$ is introduced, the equation that gives the change of the robot's orientation can be written as:

2.2 Calculation of the length measured by the measurement wheel

The length measured by the measurement wheel Δl_1 is data read directly from the distance encoder; how-

toda potrebujemo njegovo povezavo s preostalimi spremenljivkami v merilnem sistemu. Postopek izračuna je podoben zgornjemu izračunu spremembe robotove usmeritve, le da tokrat uporabimo trikotnik $\Delta B_1 B_2 E$. Najprej izračunamo vse trikotnikove notranje kote:

$$\sigma = (\Delta\Theta + \Delta\beta)/2$$

$$\angle B_1 B_2 E = \sigma - \varepsilon = \beta_2 + \rho - \Delta\beta/2$$

$$\angle B_2 B_1 E = \pi - \eta = \pi/2 - \beta_1 - \rho + \Delta\Theta/2$$

nato pa še dolžine njegovih stranic. Tudi v tem trikotniku uporabimo sinusni izrek in dobimo:

$$\frac{2c \sin((\Delta\Theta + \Delta\beta)/2)}{\sin(\pi/2 - \beta_1 - \rho + \Delta\Theta/2)} = \frac{\Delta l_1}{\sin(\beta_2 + \rho - \Delta\beta/2)} = \frac{2r_b \sin(\Delta\Theta/2)}{\sin(\pi/2 - (\Delta\Theta + \Delta\beta)/2)}$$

Iz razmerja prvih dveh ulomkov dobimo diferencialno enačbo, če pošljemo spremembu $\Delta\beta$ in $\Delta\Theta$ proti nič. Spet pa se moramo zavedati, da vse nadaljnje enačbe veljajo le v primeru, da merilno kolesce ni poravnano:

$$\frac{c(d\Theta + d\beta)}{\cos(\beta + \rho)} = \frac{dl_1}{\sin(\beta + \rho)} \Leftrightarrow c \frac{\sin(\beta + \rho)}{\cos(\beta + \rho)} (d\Theta + d\beta) = dl_1$$

Na mesto $d\Theta$ vstavimo diferencialno enačbo (4):

$$dl_1 = \frac{\sin(\beta + \rho)}{\cos(\beta + \rho)} \left(\frac{c}{r_b \cos(\beta + \rho) - c} + 1 \right) d\beta$$

Levo stran diferencialne enačbe integriramo od 0 do Δl_1 , desno stran pa od β_1 do β_2 in po integraciji dobimo:

$$\Delta l_1 = c \ln \left(\frac{\cos(\beta_1 + \rho) - cK_b}{\cos(\beta_2 + \rho) - cK_b} \right) \quad (6)$$

kjer smo števec in imenovalec v ulomku logaritma pomnožili z $1/r_b$ ter le tega, kakor zgoraj, v izračunu za $\Delta\Theta$, zapisali z ukrivljenostjo K_b .

Kakor smo med samo izpeljavajo enačb merilnega sistema že omenili, smemo izraza za $\Delta\Theta$, enačba (5) in K_b , enačba (6), uporabiti le v primeru, da merilno kolesce ni bilo poravnano. Raziskati je torej potrebno še primer, da je merilno že poravnano glede na smer gibanja robota.

3 PORAVNANO MERILNO KOLESCE (PMK)

Geometrijska oblika premika v primeru poravnanega merilnega kolesca je prikazana na sliki 3.

Na sliki smo si pomagali s premaknjениm koordinatnim sistemom, kjer je S' središče krožnic, po kateri se giblje robotova referenčna točka (z ukrivljenostjo K), oziroma krožnice, po kateri se giblje dotikalnišče merilnega kolesca (K_1); E in G sta pomožni točki.

ever, it should be related to the other system variables. The procedure we will use is somewhat similar to the one above, except that triangle $\Delta B_1 B_2 E$ is observed this time.

All three angles are determined first:

and all three sides. After that the sine theorem is applied for this triangle too, obtaining:

From the relation between the first two fractions another differential equation is obtained, limiting the differences $\Delta\beta$ and $\Delta\Theta$ to zero. Again, the equations hold for the NMW case:

$$c \frac{\sin(\beta + \rho)}{\cos(\beta + \rho)} (d\Theta + d\beta) = dl_1$$

The differential equation (4) is applied in the place of $d\Theta$:

$$dl_1 = \frac{\sin(\beta + \rho)}{\cos(\beta + \rho)} \left(\frac{c}{r_b \cos(\beta + \rho) - c} + 1 \right) d\beta$$

The left-hand side of the equation is integrated from 0 to Δl_1 , whereas the right-hand side is integrated from β_1 to β_2 , giving:


where the numerator and the denominator of the logarithm fraction were multiplied by $1/r_b$ and replaced, as above, by the curvature K_b .

As already mentioned, the expressions for $\Delta\Theta$ Eq. (5) and Δl_1 , Eq. (6), apply to the NMW case only. What is left is the discussion of the AMW case, which follows below.

3 ALIGNED MEASUREMENT WHEEL (AMW)

The geometry of the robot's movement is illustrated in Fig.3.

A translated coordinate system, where S' denotes the centre of the circular arcs that are the robot's reference point (curvature K), or the measurement-wheel contact point (K_1), which they are moving along, can be seen in the figure. E and G are the auxiliary points.

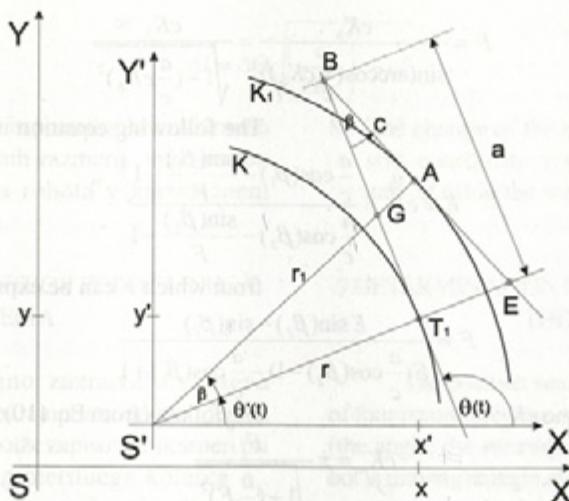

Sl. 3. Geometrijska oblika premika za PMK
Fig. 3. Geometrical illustration of the AMW-type movements

Pri izpeljavi enačb si pomagamo s podobnimi trikotniki:

$$\Delta S'T_1G \approx \Delta BAG \approx \Delta S'AE \approx \Delta BT_1E$$

Izraza za ukrivljenost krožnic K in K_1 izpeljemo, ker sta kota $\angle S'T_1G$ in $\angle BAG$ prava, iz osnovnih trigonometričnih funkcij:

$$K = \frac{\sin(\beta)}{a \cos(\beta) - c}$$

$$K_1 = \frac{K \cos(\beta)}{1 + Kc \sin(\beta)}$$

Nadalje torej lahko izračunamo spremembo smeri $\Delta\Theta$ in spremembo premika Δl , saj velja

$$\Delta\Theta = \frac{\Delta l}{r} = \frac{\Delta l_1}{r_1} = \Delta l_1 K_1 = \frac{\Delta l_1 K \cos(\beta)}{1 + Kc \sin(\beta)} \quad (7)$$

$$\Delta l = \frac{\Delta\Theta}{K} = \frac{\Delta l_1 K_1}{K} = \frac{\Delta l_1 \cos(\beta)}{1 + Kc \sin(\beta)} \quad (8)$$

The appropriate equations are derived from similar triangles:

Since the angles $\angle S'T_1G$ and $\angle BAG$ are rectangles, the expressions for the curvatures K and K_1 can be obtained using trigonometric functions:

The expressions for the change of the orientation $\Delta\Theta$ and the distance Δl can then be written:

4 IZVEDBA SKUPNEGA MERILNEGA SISTEMA (NMK IN PMK)

Enačba (6) podaja razmerje med ukrivljenostjo K_b , začetnim kotom β_1 , končnim kotom β_2 in razdaljo, ki jo prevozi merilno kolesce Δl_1 . Vrednosti β_1 , β_2 in Δl_1 so znane, izračunati pa je treba K_b , najbolje kar skupaj z odmaknjeno, ker se pač pojavljata skupaj.

Enačbo (6) delimo s c in damo obe strani v eksponent. Upoštevamo še kosinus vsote kotov in vpeljemo novo spremenljivko F :

$$\cos(\beta_1 + \arccos(\frac{a}{c} K_b)) = \frac{a}{c} K_b \cos(\beta_1) - \sin(\beta_1) \sin(\arccos(\frac{a}{c} K_b))$$

4 REALIZATION OF THE ENTIRE MEASUREMENT SYSTEM (NMW AND AMW)

Eq. (6) determines the relationship among K_b , the starting angle β_1 , the final angle β_2 and the length of the straight line Δl_1 , covered by the measurement wheel. The values β_1 , β_2 and Δl_1 are known, whereas K_b should be calculated, conveniently together with the eccentricity, since they appear together.

We divide Eq. (6) by c and put both sides in the exponent. After the cosine of the sum of the angles is taken into account, we introduce a new variable, F :

$$F = \frac{cK_b}{\sin(\arccos(\frac{a}{c}cK_b))} = \frac{cK_b}{\sqrt{1-(\frac{a}{c}cK_b)^2}} \quad (9)$$

Dobimo enačbo:

$$E = e^{\frac{\Delta l}{c}} = \frac{\frac{a}{c} \cos(\beta_1) - \frac{\sin(\beta_1)}{F} - 1}{\frac{a}{c} \cos(\beta_2) - \frac{\sin(\beta_2)}{F} - 1}$$

iz katere izrazimo F :

$$F = \frac{E \sin(\beta_2) - \sin(\beta_1)}{E(\frac{a}{c} \cos(\beta_2) - 1) - \frac{a}{c} \cos(\beta_1) + 1} \quad (10)$$

Sedaj lahko iz (10) izračunamo cK_b :

$$cK_b = \pm \frac{F}{\sqrt{1 + (\frac{a}{c} F)^2}} \quad (11)$$

(Ta enačba ima dve rešitvi, $+cK_b$ in $-cK_b$. Prav tako dobimo dve rešitvi tudi iz enačbe za ρ (1), skupaj imamo torej štiri kombinacije vrednosti ρ and cK_b .)

The following equation is obtained:

from which F can be expressed:

cK_b follows from Eq. (10):

(Since this equation has two solutions, $+cK_b$ and $-cK_b$, and two more are obtained from the equation for ρ Eq. (1), we are left with four combinations of ρ and cK_b .)

4.1 Postopek merjenja

- Iz zapisovalnika smeri preberemo trenutno vrednost kota β_2 , iz zapisovalnika premika pa premik Δl .
- Če je trenutni kot zasuka merilnega kolesca β_2 enak zasuku iz prejšnje meritve β_1 , je merilno kolesce poravnano v smeri vožnje, primer PMK, zato izračunamo $\Delta\Theta$ in Δl iz (7) in (8). Sicer nadaljujemo s točko 3.
- Izračunamo vrednost cK_b ((10) in (11)).
- Določimo kot $\rho = \arccos(a/c cK_b)$.
- Preverimo kateri par $\{(+\rho, +cK_b), (+\rho, -cK_b), (-\rho, +cK_b), (-\rho, -cK_b)\}$ ustreza (6).
- Pravi par vstavimo v enačbo (5) in izračunamo spremembo kota $\Delta\Theta$.
- Iz spremembe kota $\Delta\Theta$ določimo premik Δl :
 - Če je sprememba kota $\Delta\Theta$ enaka nič, premični robot vozi naravnost, merilno kolesce pa se poravnava v smer vožnje: medtem ko se referenčna točka robota premakne za, recimo, l , se odmaknjeno merilnega kolesca zmanjša z β_1 na β_2 . Premik l je podan z enačbo:

$$l = c \left(\frac{\tan(\beta_1/2)}{\tan(\beta_2/2)} \right)$$

(natančna obravnavana poravnavanja kolesca je podana v [3]).

- Sicer iz spremembe $\Delta\Theta$ in ukrivljenosti K_b izračunamo premik referenčne točke robota Δl (glej trikotnika $\Delta S'T_{11}B_1$ in $\Delta S'T_{12}B_2$ na sliki 2):

4.1 Measurement procedure

- Read current values: the value of angle β_2 from the steering encoder, and the length Δl , from the distance encoder.
- If the current angle β_2 is equal to the angle β_1 , from the previous measurement, the AMW case applies; $\Delta\Theta$ and Δl are calculated from Eq. (7) and Eq. (8). Otherwise we proceed with point 3.
- Calculate cK_b (Eq. (10) and Eq. (11)).
- Determine $\rho = \arccos(a/c cK_b)$.
- Check which pair among $\{(+\rho, +cK_b), (+\rho, -cK_b), (-\rho, +cK_b), (-\rho, -cK_b)\}$ correspond to Eq. (6).
- Put the corresponding pair into Eq. (5) and calculate the change of orientation $\Delta\Theta$.
- From $\Delta\Theta$ calculate Δl :
 - If the change of the orientation $\Delta\Theta$ is zero, the mobile robot drives along a straight line, while the measurement wheel is still aligning with the direction of the drive: if the reference point moves by, for example, l , the nonalignment of the measurement wheel is decreased from β_1 to β_2 . The move l is defined by the equation:

(the complete explanation is given in [3]).

- Otherwise, calculate the movement of the robot's reference point Δl , using $\Delta\Theta$ and the curvature K_b (observe the triangles $\Delta S'T_{11}B_1$ and $\Delta S'T_{12}B_2$ in Fig.2):

$$\Delta l = \Delta \Theta \sqrt{\left(\frac{c}{cK_b}\right)^2 - a^2}$$

8. Iz spremembe kota $\Delta\Theta$ in premika Δl izračunamo z uporabo dobro znanih razmerij sprememb položaja premičnega robota v kartezičnem koordinatnem sistemu.

5 DOLOČITEV PARAMETROV POLOŽAJNEGA SISTEMA

Opisano položajno zaznavalo zahteva določitev vrednosti štirih parametrov: odmaknjenos c , ničelni kot β_0 (kot, ki ga kaže zapisovalnik smeri pri vožnji naravnost), obseg merilnega kolesca o_1 , oddaljenost položajnega zaznavala od referenčne točke robota a .

Na začetku moramo te parametre seveda določiti ročno, toda tako dobljene vrednosti so le grobe ocene; natančnejše vrednosti določimo tako, da robot vozi po poteh, pri katerih se vpliv posameznih parametrov čim bolj osami. Pri vožnji naravnost, na primer, parameter a ne vpliva kaj dosti, vsak od preostalih treh pa vpliva drugače. Za določitev vrednosti parametrov smo zato izbrali prav vožnjo naravnost. Ob njej smo spremljali potek robotove lege in graf usmeritve robota Θ . Grafi izmerjenih leg robota in njegove usmeritve so potrdili, da odmaknjenos c vpliva samo na začetku, ko merilno kolesce še ni poravnano, da ničelni kot β_0 določa nagib spremenjanja kota Θ (ki bi pri vožnji naravnost sicer moral ostati stalen) ter da obseg kolesca o_1 ne vpliva bistveno na spremenjanje Θ , občutno pa vpliva na dolžino poti.

Podrobnejše rezultate parametrične analize si lahko ogledamo v [3], kjer je tudi razloženo, zakaj mora biti vrstni red določanja parametrov naslednji: c , β_0 in o_1 . Parameter a določimo z vožnjo po krogih.

Ker je položajno zaznavalo zasnovano na relativnem merjenju, se njegova napaka neprestano povečuje, zato je zelo pomembna ocena njegovih parametrov. V našem primeru so končne vrednosti parametrov bile: $\beta_0 = 196,708^\circ$, $c = 0,04014$ m, $o_1 = 0,2985$ m in $a = 0,5678$ m. Vse so bile seveda pridobljene programsko, na temelju testnih voženj robota.

8. The change of the robot's position in the Cartesian coordinate system is calculated from $\Delta\Theta$ and Δl using the well-known relations.

5 DETERMINATION OF THE PARAMETERS OF THE SENSOR

The position sensor requires the determination of four parameters: the eccentricity c , the zero angle β_0 (the angle, the steering encoder reports when the robot is moving straight ahead), the circumference of the measurement wheel o_1 , and the distance from the position sensor to the reference point of the robot a .

At the beginning these parameters have to be determined manually, yet these are only coarse approximations of the real values; the finer values are obtained by letting the robot move along the kind of paths on which the impact of the individual parameter is isolated as much as possible. If the robot moves along the straight line, for example, parameter a does not have much influence, while each of the remaining affect the movement in their own way. That is why we chose exactly this type of movement to determine the parameters values. The robot's position and the graph of its orientation were observed carefully along the path. The graphs of these positions and orientations proved that the eccentricity c has an impact at the beginning only, when the measurement wheel is still not aligned, that zero angle β_0 determines the inclination of the Θ graph, which should stay constant, when moving straight ahead- constant, and that circumference of the wheel o_1 does not have an observable impact on the graph Θ , but it does have a substantial influence on the length of the paths.


Detailed results of the parametric analysis can be found in [3], where the explanation as to why the order of the parameter determination should be c , β_0 and o_1 , is given. The parameter a is determined by the circular paths.

Since the presented sensor is based on relative measurements, its error grows without bounds, so a correct estimation of the parametric values is crucial. The final values in our case were: $\beta_0 = 196,708^\circ$, $c = 0,04014$ m, $o_1 = 0,2985$ m and $a = 0,5678$ m. All of them were, of course, obtained from the dedicated software that analyzed the paths of the robot.

6 REZULTATI

Položajno zaznavalo smo preizkusili na lastnem premičnem robotu (sl. 4). Premični robot je bil opremljen z dvema merilnima sistemoma. Ob pogonskih kolesih zadaj je imel pritrjen par pomožnih merilnih koles, ki zagotavljajo tudi za več ko red velikosti [4] natančnejšo lego, kot jo dobimo na podlagi zapisovalnikov, pritrjenih na samih pogonskih kolesih, spredaj pa v prispevku predstavljeni pozicijski merilnik (sl. 4a). Podlaga so bila gladka tla iz linoleja (sl. 4b).

Položajno zaznavalo smo preizkušali na dveh vrstah poti: na prvi (sl. 5a), smo robota programirali, da je vozil "osmico", torej štiri leve in štiri desne zavoje; na drugi (sl. 5b), smo preverili vožnjo naravnost, po dolgem in ozkem hodniku.

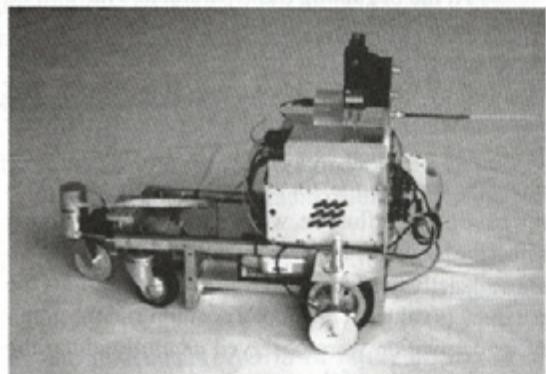


a)

6 RESULTS


The position sensor was tested on our own mobile robot, Fig.4. The robot was equipped with two measuring systems. To the left and to the right of the driving wheels there was a pair of additional measurement wheels, which guarantee an order more accurate position than the one calculated from the readings of the encoders mounted directly on the driving wheel shaft; in the front, the presented position sensor can be observed, Fig.4a. The floor was smooth, made of linoleum, Fig.4b.

The position sensor was tested on two types of paths: on the first (Fig.5a), the robot was programmed to make 8 turns, i.e., four left and four right turns; on the second (Fig. 5b), the robot moves along a long and narrow corridor.

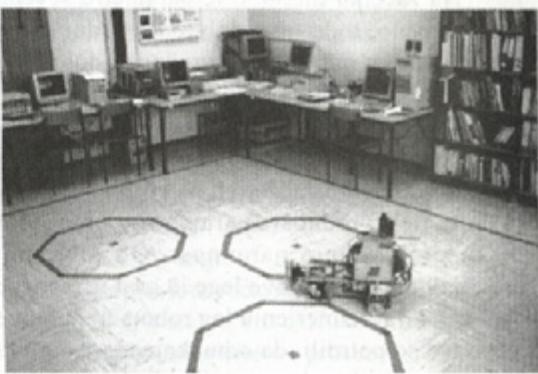


b)

Sl. 4. V preizkusih uporabljeni premični robot: a) zadaj, ob pogonskih kolesih, klasični par dodatnih merilnih koles; spredaj, v prispevku predstavljeno zaznavalo; b) vožnja v laboratoriju
Fig. 4. The mobile robot from the experiments: a) at the back, on each side of the driving wheels, a pair of classical measurement wheels, at the front, the proposed sensor; b) the drive in the laboratory

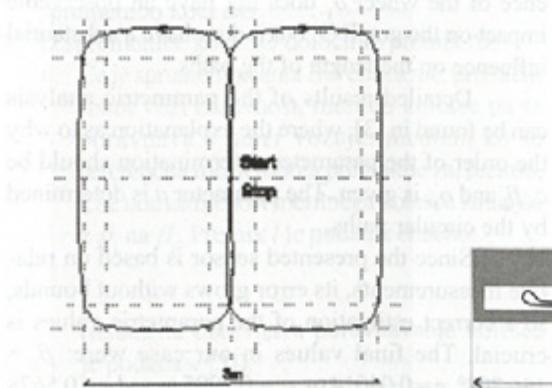

a)

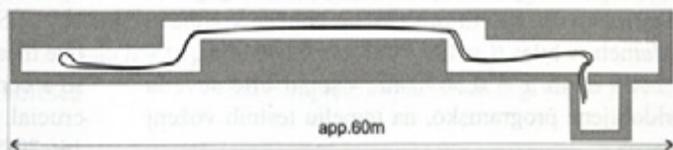

b)

Sl. 5. Dve vrsti poti: a) osmica, b) dolg in ozek hodnik


Fig. 5. Two types of paths: a) a figure-of-eight path, b) a long and narrow corridor

6.1 Prva vrsta poti: osmica

V tem primeru naj bi se robot, potem ko je na približno trimetrskem kvadratu opravil osem zavojev za 90° , vrnil v izhodiščno točko. Namens tega testa je bil preverjanje položajnega merilnika ob zavijanju. Dolžina poti je bila približno 20 m, robotovo napako po desetih preizkusih pa vidimo na sliki 6a. Napaka je nekoliko večja v vzdolžni smeri (Y), vendar še vedno precej majhna ($<0.4\%$), tudi za skupino robotov s pomožnimi merilnimi kolesi [2].

6.2 Druga vrsta poti: hodnik

Glavni problem dolgih in ozkih poti, kakršen je hodnik pred laboratorijem (sl. 5b), je natančnost ničelnega kota β_0 kodirnika smeri, ki na usmeritev robota vpliva najbolj. Nenatančen povzroči vrtenje izračunanih poti, zato se pri tako dolgih poteh robot kaj lahko znajde v bližnjih stenah. Naše ocene za β_0 so se tako z že omenjenih $196,708^\circ$ znižale na $196,617^\circ$, dokler se robotu pri $196,608^\circ$ končno ni uspelo vrniti skozi vrata laboratorija na izhodiščni položaj; po prevoženih približno 120 m. Relativna napaka je tudi v tem primeru ostala $<0.4\%$ (sl. 6b).

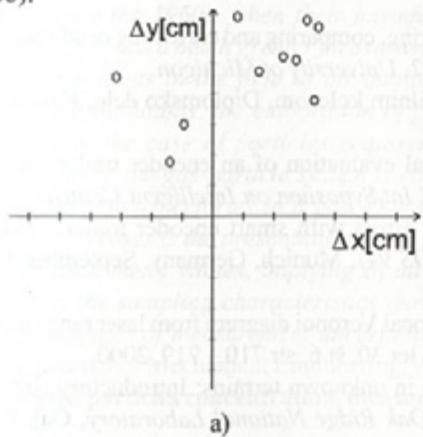

a)

6.1 The first type: figure-of-eight path

The robot was supposed to come back to the starting point, after accomplishing eight 90° turns on a square of $3m \times 3m$. The purpose of the test was to examine the behaviour of the sensor when a lot of turning is involved. The length of the path was approximately 20m; the positional error after ten trials can be seen in Fig.6. The error is somewhat bigger in the longitudinal (Y) than in the lateral (X) direction, but it is still reasonably small ($<0.4\%$), even for the group of robots with additional measurement wheels [2].

6.2 The second type: corridor

The main problem with long and narrow working places, like the corridor in front of the lab, Fig. 5b, is the accuracy of the zero angle β_0 of the steering encoder, which has the strongest impact among all the parameters. An inaccurate β_0 results in the rotation of the paths, and the robot can quickly find itself hitting the walls. Our starting estimations for the β_0 values were reduced from the value already mentioned, 196.708° , to 196.617° , until the robot finally at 196.608° managed to re-enter through the lab door to the approximate starting position; after a 120-m-long journey. The relative error also remained $<0.4\%$ in this case (Fig. 6b).

Št. preizkusa Exp. no.	Δx [m]	Δy [m]
1	-0,101	-0,309
2	0,079	0,430
3	0,024	0,261
4	0,068	0,372

b)

Sl. 6. Napaka po opravljenih testnih poteh: a) napaka robotove lege po prevoženih osmicih; b) napaka robotove lege po vožnjah v hodniku

Fig. 6. Position error after the tests: a) position error after the figure-of-eight turns ; b) position error after the journey in the corridor

7 SKLEPI

Predstavili smo rezultate položajenja premičnega robota z izvirim odometričnim položajnim zaznavalom, zasnovanim na samo enem dodatnem

7 CONCLUSIONS

The results of the experiments with a new odometrical position sensor, designed with one additional measuring wheel only, are presented. The

merilnem kolescu. Položajno zaznavalo sestavlja absolutni kodimik za merjenje usmerjenosti merilnega kolesca in relativni kodimik za merjenje prevožene poti. Preizkusi so pokazali, da je predlagano zaznavalo v natančnosti povsem primerljivo običajni rešitvi z dvema dodatnima merilnima kolescema ob pogonskih kolesih. Njegova prednost pa je v tem, da ga lahko namestimo na poljubnem mestu na robotu, zato je uporabnik z njegovo namestitvijo bistveno manj omejen. Pravzaprav bi lahko robota opremili celo z več takimi zaznavali in njihove rezultate povprečili.

Težavo pri uporabi pa pomeni razmeroma zamudno določanje vrednosti štirih parametrov: β_0 , c , o_1 in a .

Na prvi pogled se zdi, da bi bila lahko težava, ali pa vsaj omejitve, morebitna neporavnost med usmerjenostjo robota in izmanknjeno nameščenim merilnim kolescem zaznavala ob vklopu robota: izkaže se, da matematični opis v primeru NMK povsem zadovoljivo podaja položaj tudi v tem primeru. Kako je merilno kolesce zasukano, torej ni treba skrbeti niti pred prvo vožnjo.

sensor consists of an absolute encoder, which measures the orientation of the measuring wheel, and of a relative optical encoder, which measures the length of the path. Experiments proved the proposed sensor to be completely comparable to the classical solution with two measurement wheels mounted on each side of the driving wheels. However, it has the advantage that it can be mounted at an arbitrary place around the robot, so the user is far less restricted in terms of its use. In fact, one could equip the robot with even more position sensors and average their results.

The main problems associated with its use relate to the determination of its four parameters, β_0 , c , o_1 and a .

At first sight it appears that the problem might be a possible misalignment of the orientation of the robot and the eccentrically mounted measuring wheel; however, it turned out that the discussion given in the case of NMW also holds good in this example. The actual orientation of the measuring wheel is not a problem, even before the first run.

8 LITERATURA

8 LITERATURE

- [1] J.Borenstein, H.R.Everett, L.Feng (1996) Navigating mobile robots-systems and techniques, *A K Peters, Wellesley, Massachusetts*.
- [2] J.Borenstein, L.Feng (1994) UMBmark - a method for measuring, comparing and correcting dead-reckoning errors in mobile robots, Technical Report UM-MEAM-94-22, *University of Michigan*.
- [3] M.Blatnik (1996) Navigacija mobilnega robota z enim merilnim kolesom, Diplomsko delo, *Fakulteta za računalništvo in informatiko, Ljubljana*.
- [4] Z.Fan, J.Borenstein, D.Wehe, Y.Koren (1995) Experimental evaluation of an encoder trailer for dead-reckoning in tracked mobile robots. *Proc. of the 10th IEEE Int.Syposium on Intelligent Control*.
- [5] J.Borenstein (1994) Internal correction of dead-reckoning errors with smart encoder trailer, *Proc. of International Conf. on Intelligent Robots and Systems (IROS'94)*, Munich, Germany, September 12-16, 1994, str. 127-134.
- [6] R.Mahkovic, T.Slivnik (2000) Constructing the generalized local Voronoi diagram from laser range scanner data, *IEEE Transactions on Systems, Man, and Cybernetics*, let.30, št.6, str.710 – 719, 2000.
- [7] N.S.V.Rao, S.Kareti, S.S. Iyengar (1993) Robot navigation in unknown terrains: Introductory survey of non-heuristic algorithms. Technical report, ornl/tm-12410, *Oak Ridge National Laboratory, Oak Ridge, Tennessee*, 37831.

Avtorjev naslov: doc. dr. Rajko Mahkovic
Univerza v Ljubljani
Fakulteta za računalništvo in
informatiko
Tržaška 25
1000 Ljubljana
rajko.mahkovic@fri.uni-lj.si

Author's Address: Doc. Dr. Rajko Mahkovic
University of Ljubljana
Faculty of Computer and
Information Science
Tržaška 25
1000 Ljubljana, Slovenia
rajko.mahkovic@fri.uni-lj.si

Prejeto: 15.3.2006
Received: 15.3.2006

Sprejeto: 25.4.2007
Accepted: 25.4.2007

Odprto za diskusijo: 1 leto
Open for discussion: 1 year